


# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:

D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

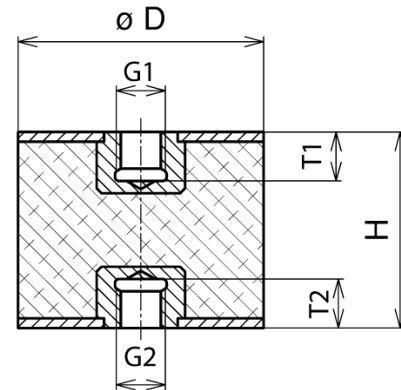

## 1. Table of Contents


1. Table of Contents
2. Application Analysis Data
  - 2.1 Calculated Results in Compression and Shear
    - Example Application
3. Recommended Compression Load
4. Recommended Shear Load
5. Compression/Injection Molded Standard Product Tolerances
6. Rubber Selection
7. Tightening Torque and Bolt Grades & Class
8. Torque Threaded Stud Test of elasto-A- and B-Mounts
9. Certificate of RoHS compliance and shelf life expectancy.

# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:

D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

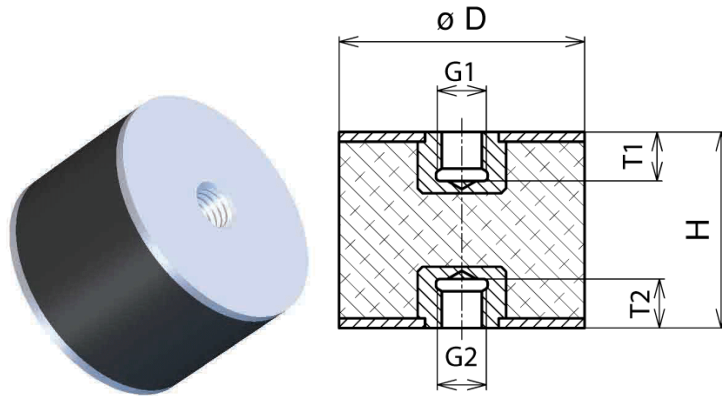

## 2. Application Analysis Data


Total supported weight:   
 Mounting Quantity  Qty  
 Force per Mount  [N]  
                                    kgf  
                                    lbf  
                                    [kN]  
 Frequency Source  cpm  
                                    Hz

## 2.1 Calculated Result

### Compression:

Deflection  ?  
 Spring Rate  ?  
 Natural Frequency  ? cpm  
                                    ? Hz  
 Frequency Ratio  ? N/mm2  
 Calculated Isolation  ?

## Example Application

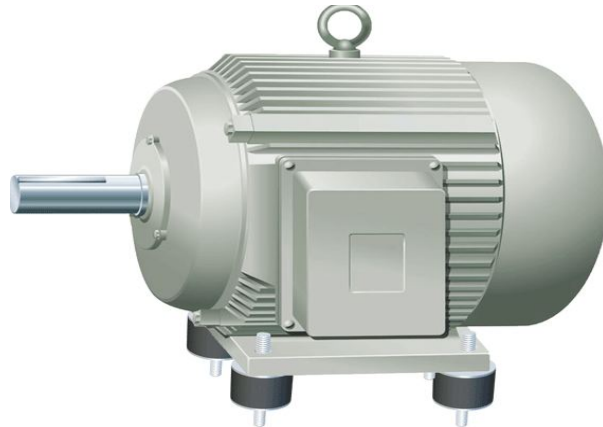

### Shear:


Deflection  ?  
 Spring Rate  ?  
 Natural frequency  ? cpm  
                                    ? Hz  
 Frequency Ratio  ? N/mm2  
 Isolation  ?

# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:

D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

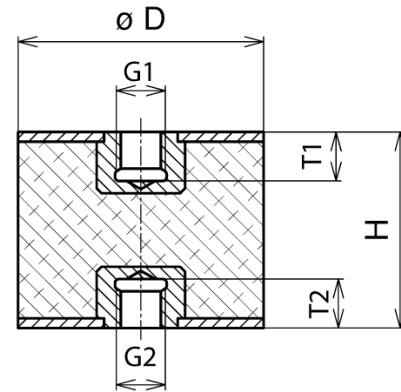

## 3. Recommended Compression Load


### Compression Information

Deflection	<input type="text"/>	?
Spring Rate	<input type="text"/>	?
Maximum Stress	<input type="text"/>	?

### Compression Deflection Information

?
?
? Natural Frequency at max. load
? Isolation at

Maximum Force	
Maximum Deflection	
Stress	<input type="text"/> 0.00
max. force at 15%	<input type="text"/> ?
Natural Frequency	<input type="text"/> ? cpm
	<input type="text"/> ? Hz
Frequency Ratio	<input type="text"/> ? N/mm2
Calculated Isolation	<input type="text"/> ?

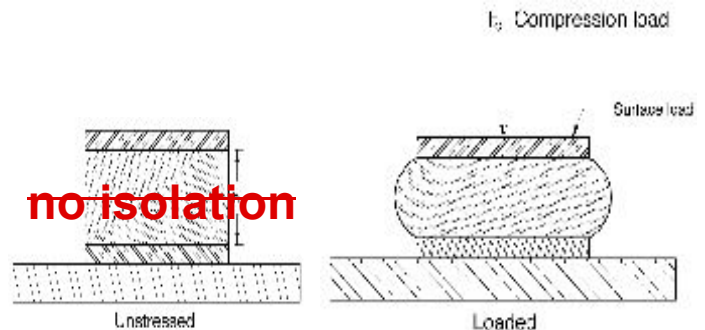


# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:

D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

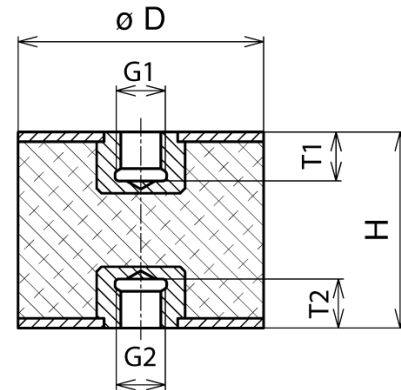

## 4. Recommended Shear Load


### Shear Information

Deflection  ?  
Spring Rate  ?  
max. stress  ?

### Shear Deflection Information

?  
?  
? Natural Frequency by max. load  
? Isolation by

max. Force  
max. Deflection   
Stress  0.00  
max. Shear Stress at 15 %  ?  
Natural frequency  ? 1/min  
 ? Hz  
Frequency Ratio  ? N/mm2  
Calculated Isolation  ?

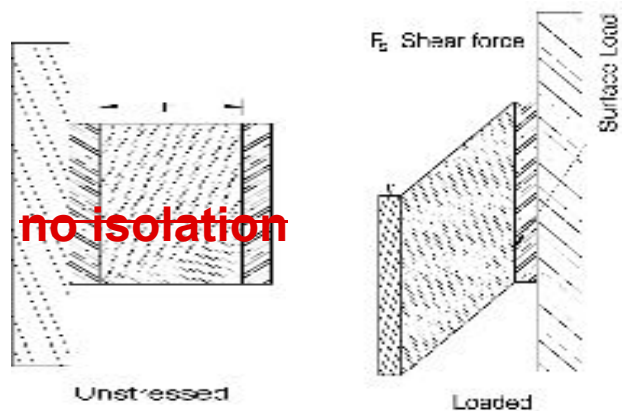


# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:

D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

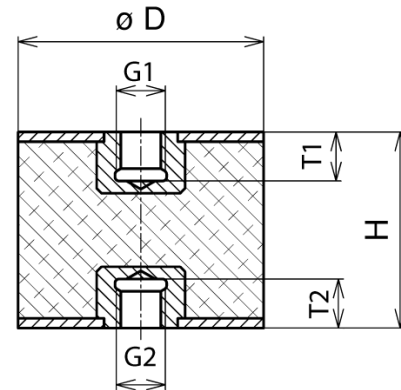

## 5. Compression/Injection Molded Standard Product Tolerances

Standard compression molded product dimensional tolerances conform to DIN ISO 3302-1 M3 C  
Standard Injection molded product tolerances conform to DIN ISO 3302-1 M3 F  
Further information regarding product/process quality can be provided upon request.

Dimensions		Dimensions		Tolerance in mm	Tolerance in Inch	Tolerance in mm	Tolerance in Inch
mm		inch		Class M3-F DIN ISO 3302-1	Class M3-F DIN ISO 3302-1	Class M3-C DIN ISO 3302-1	Class M3-C DIN ISO 3302-1
from	to	from	to	mm	inch	mm	inch
0	4	0	.15"	± 0.25	± .010	± 0.40	± .016
4	6.3	.16"	.25"	± 0.25	± .010	± 0.40	± .016
6.3	10	.25"	.39"	± 0.30	± .012	± 0.50	± .020
10	16	.39"	.63"	± 0.40	± .016	± 0.60	± .024
16	25	.63"	.98"	± 0.50	± .020	± 0.80	± .032
25	40	.98"	1.57"	± 0.60	± .024	± 1.00	± .040
40	64	1.57"	2.52"	± 0.80	± .032	± 1.30	± .051
63	100	2.38"	3.94"	± 1.00	± .040	± 1.60	± .063
100	160	3.94"	6.30"	± 1.30	± .051	± 2.00	± .079
160	-	6.30"	-	± 1.3 %	± 1.3 %	± 1.3 %	± 1.3 %



Standard rubber hardness tolerance ± 5 Shore A Durometer per ASTM D2000

# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:

D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

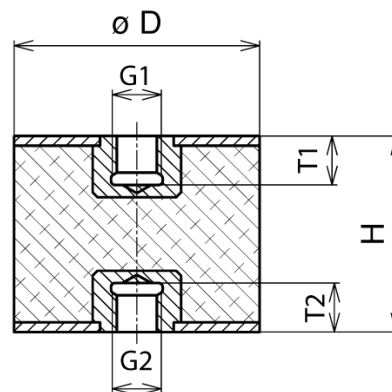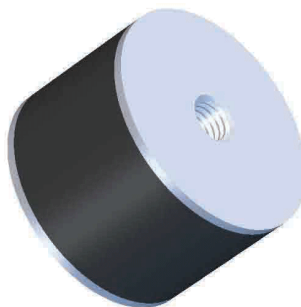

## 6. Rubber Selection

Hardness Range (ShoreA)					Temperature Resistance Range °C (F°)					Short Term Peak Temperature C° (F°)					Tensile Strength (N/mm <sup>2</sup> ) (PSI)					Tensile Elongation %					Elastomer Basic Material					Chemical-Technical Discription					Below: (Trade Name)					International Description					PROPERTIES																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																						

1 = Very Good    2 = Good    3 = Satisfactory    4 = Adequate    5 = Poor    6 = Inadequate

The above mentioned information are used for a guide and can be modified by elastometall to improve certain characteristics.




# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:

D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

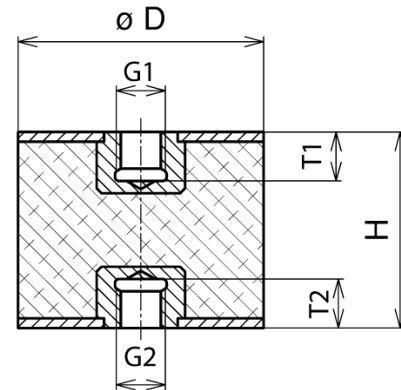

## 7. Tightening Torque and Bolt Grades & Class

Tightening Torque per ASTM A193 and A194

Metric Units: (Metric Thread)			
	CLASS 5.6	CLASS 8.8	CLASS 10.9
Thread Size & Pitch	Tightening Torque (Nm)	Tightening Torque (Nm)	Tightening Torque (Nm)
M2	0.16	0.37	0.52
M2.3	0.26	0.6	0.84
M2.6	0.37	0.86	1.21
M3	0.59	1.34	1.88
M3.5	0.9	2.06	2.89
M4	1.34	3.04	4.31
M5	2.65	6.03	8.48
M6	4.51	10.3	14.71
M7	7.45	17.16	24.52
M8	10.79	25.5	35.3
M10	21.57	50.01	70.61
M12	38.25	87.28	122.58
M14	60.8	138.27	194.17
M16	93.16	210.84	299.1
M18	127.49	411.88	411.88
M20	180.44	558.98	578.5
M22	245.17	558.98	784.54
M24	308.91	710.99	1000.28
M27	460.92	1049.32	1480.81
M30	522.73	1421.97	2010.38

English Units: (Coarse Thread)			
	GRADE 2	GRADE 5	GRADE 8
Thread Size & Pitch	Tightening Torque (ft-lb)	Tightening Torque (ft-lb)	Tightening Torque (ft-lb)
6-32	0.86	1.33	1.88
8-32	1.58	2.44	3.44
10-24	2.29	3.53	499
12-24	3.59	5.55	7.84
1/4-20	5.47	8.45	11.9
5/16-18	11.3	17.4	24.6
3/8-16	20	30.9	43.6
7/16-14	32	39.4	69.8
1/2-13	48.8	75.4	106
9/16-12	70.4	109	154
5/8-11	97.1	150	212
3/4-10	103	366	376
7/8-9	167	430	606
1-8	250	561	909
1-1/8-7	354	794	1288
1-1/4-7	500	1120	1817
1-3/8-6	655	1469	2382
1/2-6	869	1949	3161

English Units: (Fine Thread)			
	GRADE 2	GRADE 5	GRADE 8
Thread Size & Pitch	Tightening Torque (ft-lb)	Tightening Torque (ft-lb)	Tightening Torque (ft-lb)
6-40	0.96	1.49	2.1
8-36	1.66	2.57	3.63
10-32	2.61	4.04	5.7
12-28	3.83	5.92	8.36
1/4-28	6.26	9.7	13.7
5/16-24	12.5	19.3	27.2
3/8-24	22.66	35	49.4
7/16-20	35.7	55.2	77.9
1/2-20	55	84.9	120
9/16-18	78.5	121	171
5/8-18	110	170	240
3/4-16	115	297	420
7/8-14	184	473	668
1-12	273	613	995
1-1/8-12	397	891	1445
1-1/4-12	553	1241	2012
1-3/8-12	746	1673	2712
1-1/2-12	978	2194	3557


Non-Standard

# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:


D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

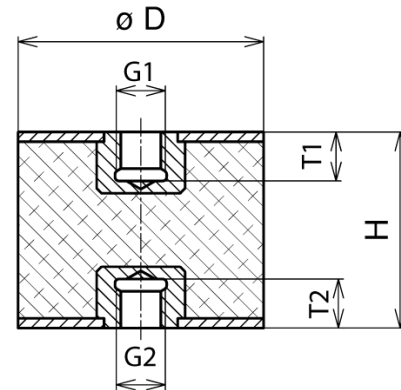

## 8. Torque Threaded Stud Test of elasto-A- and B-Mounts

Tighten flat bar steel on jaw vise. Setup required torque wrench per table. Use a nut for specimen and tighten it with torque wrench until the required torque is achieved. Loosen nut from specimen and visual check threaded studs for:

- Stud extension
- Thread pitch damaged or sheered
- Connection between washer
- Broken stud

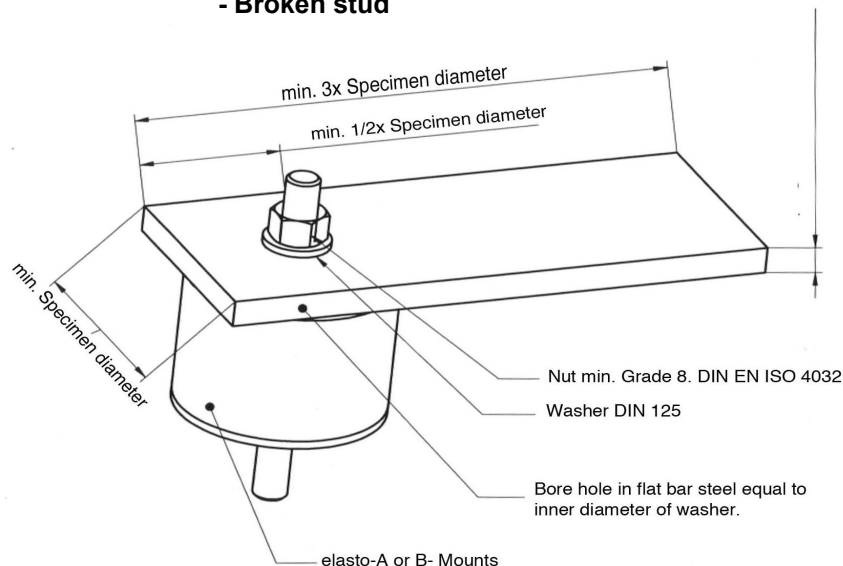




# 3020C

elasto-C-Mounts 30x20  
30x20 C M8/8 Shore A

## Dimensions:

D	H
1.18	0.79
G1	G2
M8	M8
T1	T2
0.31	0.31
Elastomer	ShoreA
	57

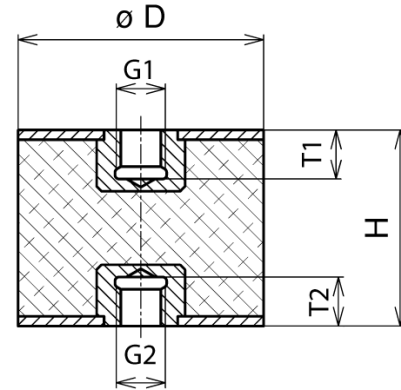

## 9. Certificate of RoHS Compliance

**Customer**

We confirm that these mounts are RoHS Compliance.

## 9. Shelf Life Expectancy

Rubber to metal bonded products have a shelf life expectancy of up to 20 years under certain conditions such as room temperature and avoiding direct sunlight or artificial lights.

**- ALWAYS KEEP PARTS AWAY FROM DIRECT SUNLIGHT AND BETWEEN 10° - 30° CELSIUS -**